

NWS-3

NOTI•FIRE•NET™ Web Server



Network Systems

General

The **NOTI•FIRE•NET™** Web Server (NWS-3) is a web-based device that acts as an HTML server, allowing remote access to the **NOTI•FIRE•NET™** network via the Internet or an intranet. With the NWS-3 interface, users can view fire alarm control panel (FACP) event history, event status, device properties and other information based on access permissions defined by the system administrator. All data available on the NWS-3 is a “snapshot” of the data on the **NOTI•FIRE•NET™** network at the time the browser requested the information.

The NWS-3 interfaces to the Internet/intranet using an IP-based wire Ethernet connection.

Features

FOR THE NOTI•FIRE•NET™ WEB SERVER AND BROWSER CONFIGURATION TOOL

- Access **NOTI•FIRE•NET™** device statuses and properties remotely via the Internet or an intranet.
- Automatically send up to 50 emails or text messages in response to any system event.
- Compatible with standard and high speed **NOTI•FIRE•NET™**.
- Unacknowledged Beep feature, if enabled, causes the computer browsing the NWS-3 to beep at three-second intervals if there are unacknowledged events in the Multiple Event List.
- Compatible with **NOTI•FIRE•NET™** version 5.0 and higher.
- One NWS-3 supports multiple users.
- Standard Ethernet over IP connection.
- Your system remains secure by installing the NWS-3 behind your network firewall.
- Supports up to 64 operator and 64 administrator accounts.
- Built-in password security and user-access record.
- Multiple users can access the web server at the same time.
- Supports standard Microsoft® Internet Explorer 8.0 or higher.
- Intuitive Explorer-style user interface.
- Ability to use **VeriFire® Tools** (version 3.0 or higher) for remote programming/configuration of the NWS-3 and ONYX® Series products.


NOTE: No fire alarm control functions are permitted. The NWS-3 is an ancillary device and not intended for primary reporting.

Compatibility

The NWS-3 is compatible with **NOTI•FIRE•NET™** version 5.0 and higher for the following panels and devices:

- ONYX® Series.
- AM2020/AFP1010 (version 5.0 SIB).
- AFP-200 (events only).
- AFP-300/AFP-400.
- BACnet Gateway (events only).
- NCS Network Control Station (events only).
- NCA(-2) Network Control Annunciator (events only).
- Compatible with high speed network HS-NCM version 1.0 and higher.

NOTE: The NWS-3 is NOT intended as a primary annunciator and is ancillary in nature.

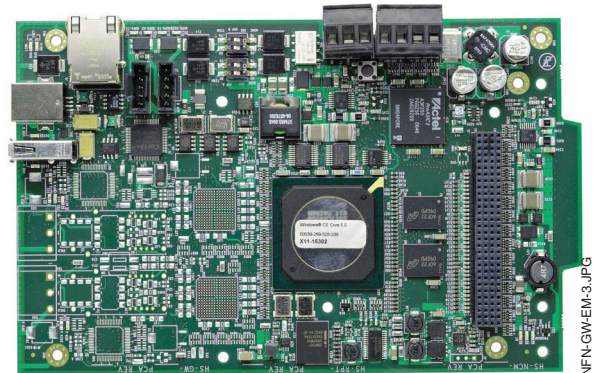

System Requirements

- **NOTI•FIRE•NET™** Web Server (NWS-3).
- NCM card.
- **Browser:** Microsoft Internet Explorer, version 8.0 or higher.
- JAVA version 6 or later.

Agency Listings and Approvals

These listings and approvals apply to the **NOTI•FIRE•NET™** Web Server. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.


- **UL/ULC Listed:** S635.
- **CSFM:** 7165-0028:0247.
- **FDNY:** COA#6045.

System Architecture


- Connect to the **NOTI•FIRE•NET™** network. The NWS-3 can be connected to the **NOTI•FIRE•NET™** network via the Network Control Module (NCM) network interface card (see diagram).

- The NWS-3 can be directly connected to ONYX® series panels for stand-alone panel applications.
- The NWS-3 can also be connected to high speed networks using HS-NCM network interface.

System Architecture Diagram

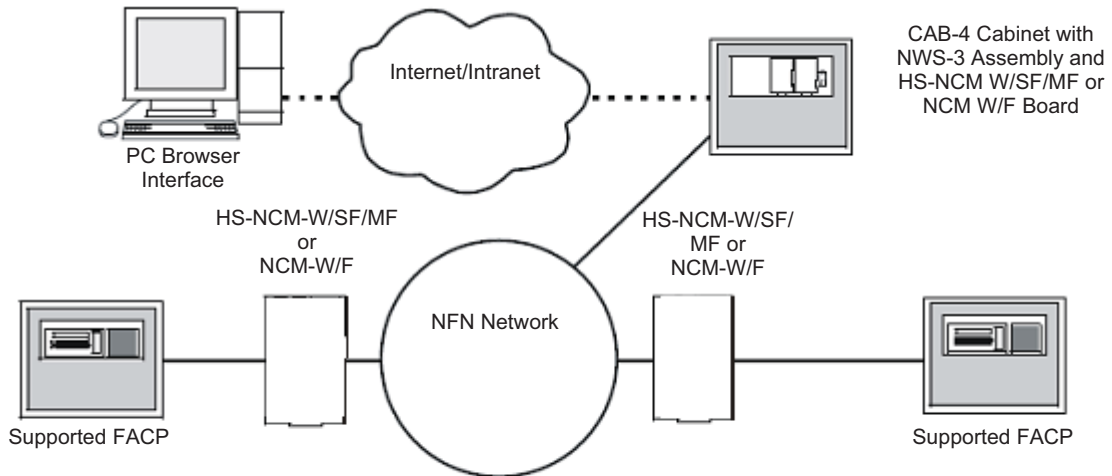

NWS-3 HS-NCM OR NCM ARCHITECTURE

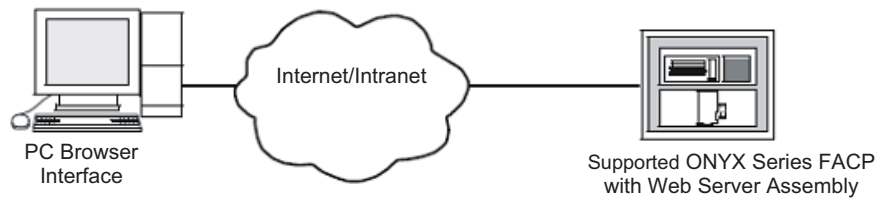

NWS-3 DIRECT PANEL ARCHITECTURE

ONYX®, NOTIFIER®, and VeriFire® are registered trademarks, and NOTI•FIRE•NET™ and ONYXWorks™ are trademarks of Honeywell International Inc. Microsoft® and Windows® are registered trademarks of Microsoft Corporation.

©2012 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Notifier. Phone: (203) 484-7161, FAX: (203) 484-7118.
www.notifier.com