

# Fire Sentry SS3 Fire and Flame Detectors **Honeywell**



**Digital Multi-Spectrum  
Electro-Optical  
Fire and Flame Detectors**

# Fire Sentry SS3 Detectors



## Features:

- Multi-Spectrum™ senses energy in the ultraviolet, Visible and Wide Band Infrared™
- False alarm immunity
- Detects hydrocarbon and non-hydrocarbon fires
- Microprocessor based algorithms: FirePic™ and Tri-Mode Plot™
- Wide field-of-view
- FS2000™ System compatible or stand alone operation
- Compatible with approved fire alarm panels

## Applications include:

- Warehouses
- Convention Centers
- Computer Rooms
- Hospitals
- Telephone Switching Stations

## Fire Sentry SS3 Multi-Spectrum Optical Fire and Flame Detectors are fast reacting, digital, reprogrammable, computerized – smart technology.

The Fire Sentry SS3 fast-reacting, Ultraviolet (UV), Wide Band Infrared (IR) and Visible spectral band electro-optical digital fire and flame detectors are designed to alarm on all types of fires. They have an alarm range of 30 ft for a one square foot gasoline reference fire with a 120° circular field of view coverage.



# Fire Sentry SS3 Detectors




To eliminate common nuisance false alarms that occasionally occur with UV-only, IR-only, Dual IR or Dual Mode UV/IR detectors, the Fire Sentry SS3 detectors' FireLogic signal processing requires that UV, visible and Wide Band IR radiant energy all be evaluated before declaring a fire. The smart detector utilizes real-time signal processing algorithms that are optimized to alarm on all types of fires, while virtually eliminating the possibility of false alarms.

The Fire Sentry SS3 detectors perform the same whether they are connected to the FS2000 Fire Early Warning System (with CM1-A Controller and FireBus) or whether they operate in the stand-alone mode. The only difference between FS2000 System model and the stand-alone models is how each is wired.


The Fire Sentry SS3 detectors are available in latching (Fire Sentry SS3-A) and non-latching (Fire Sentry SS3-AN) models.




General Specifications	
<b>Sensitivity</b>	1 sq. ft. gasoline fire at 30 feet within 5 seconds
<b>Response Time</b>	2-5 seconds to 1 sq. ft. of gasoline fire at 30 ft.
<b>Field-of-View</b>	SS3-A (UV/IR): 120 degrees cone of vision ( $\pm 60$ degrees from on axis) SS3-AB (UV): 180 degrees cone of vision ( $\pm 90$ degrees from on axis)
<b>Spectral Sensitivity</b>	Ultraviolet: 185 to 260 nanometers Wide Band Infrared: 0.7 to 3.5 micrometers (SS4-A only) Visible: 400 to 700 nanometers (SS4-A only)
<b>Input Power</b>	24 VDC nominal 12V minimum, 28V maximum
<b>Power Consumption</b>	18 mA normal operation, typical 55 mA alarm condition, typical
<b>Output Relays</b>	<b>Fire Alarm Relay:</b> NO & NC contacts Latching / Non-Latching, switch selectable Relay contact ratings: 0/5A at 120 VAC, 1.0A at 24VDC Fire alarm relay is de-energized during normal operation
<b>Operating Temperature</b>	Operation: -32 to 170°F (0 to 77°C) Storage: -4 to 185°F (-20 to 85°C)
<b>Housing</b>	NEMA 1 high impact ABS; general purpose indoor use only
<b>Weight</b>	12 ounces (0.340 kg)
<b>Dimensions</b>	4 x 5.25 x 1.75 in.
<b>Mounting</b>	Installs on a wall, ceiling, etc. with the included mounting bracket or on two properly spaced panhead screws using the Detector's double keyhole
<b>Warranty</b>	One years from factory shipping date



GENERAL DIMENSIONS

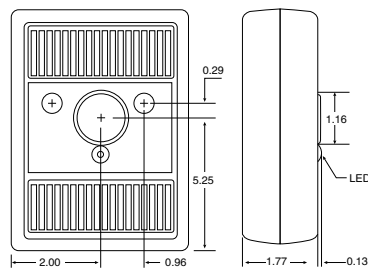


SS3-A & SS3-AN Front SS3-A & SS3-AN Side



Rear View SS3-AB & SS3-ABN

Side View SS3-AB & SS3-ABN



SS3-AB & SS3-ABN Domed Mounted Bracket

## Customer business centre

**Korea:** +82-2-69090300

**Singapore:** +65-65803776

**Australia:** +61-3-94642770

**Taiwan:** +886-3-5169284

**China:** +86-21-28943293

## Technical Services

AP: [ha.ap.service@honeywell.com](mailto:ha.ap.service@honeywell.com)

EMEA: [ha.emea.service@honeywell.com](mailto:ha.emea.service@honeywell.com)

US: [ha.us.service@honeywell.com](mailto:ha.us.service@honeywell.com)

[www.honeywell.com](http://www.honeywell.com)

# Honeywell

## Please Note:

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.

SS01142\_v1 09/12

© 2012 Honeywell Analytics