

# HW-TG7LAF02 / HW-TG7LVF02

CLSS-Enabled LTE Commercial Fire Alarm Communicators for AT&T® and Verizon®

## The dialer capture solution to connect commercial fire systems to central monitoring stations and the CLSS Cloud.

Enabled by cooperation between Telguard® and Honeywell®, the HW-TG7L Fire Series starts with Telguard's model TG-7FS and adds the powerful capabilities of Honeywell's Connected Life Safety Services (CLSS) Cloud.

The CLSS LTE Fire Communicator transmits alarm signals from the fire panel over the LTE networks of AT&T (HW-TG7LAF02) and Verizon (HW-TG7LVF02) to the designated monitoring station while leveraging connectivity with CLSS to enable powerful tools. Compliant with 2019 and earlier editions of NFPA 72, the CLSS LTE Fire Communicator can serve as the sole communication path. For existing installations, all landlines dedicated to the master control unit can be replaced with a single CLSS LTE Fire Communicator because of its 5 or 60-minute supervision modes.

### HONEYWELL CONNECTED LIFE SAFETY SERVICES (CLSS)

Honeywell CLSS is an innovative, all-in-one cloud platform that enables systems integrators and facilities managers to deliver an enhanced fire safety service, while maximizing the performance efficiencies offered by Honeywell's trusted detection and alarm systems. The CLSS platform enables users to:

- Get a "bird's eye" view of all accounts
- Obtain real-time information on event generation, enabling diagnosis before dispatch
- Conduct tests and inspections using a mobile app
- Provide end users with inspection reports, multi-site asset information, and event alerts

### TELGUARD INTERNET PORTAL

Telguard makes adopting cellular easy with a secure internet portal that provides total account management of UL-listed Telguard cellular alarm communicators. Quickly access Telguard-based services 24/7.

### TELGUARD CELLULAR SERVICE

Telguard Cellular Service provides AT&T and Verizon® LTE network coverage for all Telguard units. In Canada, cellular service may be provided by Rogers, Bell, TELUS, or SaskTel. Telguard's Communication Center is UL compliant and provides seamless connectivity between the alarm panel, the Telguard family of products, and the central station. Telguard technical support provides a single point of contact for both cellular service and Telguard product questions.

## FEATURES AND BENEFITS

- Integration with CLSS enables monitoring of event transmission data & management of device inventory from the CLSS mobile app and web portal (available only when using Contact ID and point-based reporting)
- Alarm format support for contact ID, SIA2, pulse (3x1, 4x2), modem I1e, I11a, and DMP
- Certified for use on the AT&T and Verizon LTE networks
- Meets UL 864 requirements for sole primary or backup path communications
- Minimizes false alarms by providing dual paths for self-tests
- Falls back to 3G/4G if an LTE network is not available, for extended network coverage
- 60- or 5-minute cellular supervision available; 180-seconds available in Canada
- Telephone line monitor built-in, with standard line security
- Automatic self-test (daily or 6-hour)
- Available relay output for tripping the alarm control panel when a trouble condition occurs
- Locking, red metal enclosure
- Two programmable supervisory trip outputs
- Allows full data reporting for unlimited point-to-point signal details and maximum transmitting power for superior in-building penetration



TURBOCHARGED BY  
 **HONEYWELL FORGE®**

A powerful software platform that enables Honeywell to provide real-time data and intelligence in its applications for connected buildings.

**Honeywell**



# HW-TG7LAF02 / HW-TG7LVF02 TECHNICAL SPECIFICATIONS

## Electrical

- **Power Consumption:** 40 mA (Standby)  
160 mA (Transmission) with link supervision enabled
- **Source:** 12 VAC, 800mA UL listed plug-in transformer (included)

## Physical

- **Dimensions:** 7.5" (190.5 mm) H x 11.5" (292 mm) W x 3.5" (89 mm) D
- **Shipping Weight:** 8 lbs. (3.63 kg)
- **Operating Environment:** 32°F (0°C) to 122°F (50°C); up to 95% humidity (non-condensing)

## Radio Transceiver

- **Transmit Power:** 200 mW in all bands
- **LTE Bands:** 2, 4 & 17
- **3G Bands:** 2 & 5
- **Antenna:** 9" dipole with 2dBi gain 12 ft of cable and universal mounting bracket
- **FCC:** Part 15, 22, 24, 27 and 68 compliant

## ORDERING INFORMATION

**HW-TG7LAF02:** CLSS LTE Fire Communicator for AT&T

**HW-TG7LVF02:** CLSS LTE Fire Communicator for Verizon

### Accessories Available from Telguard:

- Low Loss, High Performance Cables:
  - ◆ **ACD-12:** 12 ft (3.7m)
  - ◆ **ACD-35:** 35 ft (10.7m)
  - ◆ **ACD-50:** 50 ft (15.2m)
  - ◆ **ACD-100:** 100 ft (30.5m)
- HGDL-0: High Gain Directional LTE Antenna
- EXDL-0: External Omnidirectional LTE

## STANDARDS AND CODES

### UL Listings:

- 864: Control units and accessories for fire alarm systems
- 365: Police Station connected burglar alarm units and systems
- 1610: Central station burglar alarm units; Line security services
- 985: Household fire warning systems
- 1023: Household burglar alarm systems

### ULC Listings (AT&T only)\*:

- S545: Canadian household fire warning systems
- S304: Canadian commercial burglary alarm systems
- S559: Equipment for fire signal receiving centres and systems
- C0123: Canadian household burglary alarm systems

\*In Canada, cellular data may be carried by Rogers, Bell, Telus, or SaskTel.

### Other:

- NYC Fire Department Certificate of Approval #6316
- Los Angeles Fire Department Approved.

Visit [www.telguard.com](http://www.telguard.com) for the most current product listings.

AT&T® is a registered trademark of the AT&T Properties, L.P.


Honeywell® and HONEYWELL FORGE® are registered trademarks of Honeywell International, Inc.

Telguard® is a registered trademark of the Telular Corporation, a business unit of AMETEK, Inc.

Verizon® is a registered trademark of Verizon Trademark Services LLC.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

Country of origin: U.S.A.

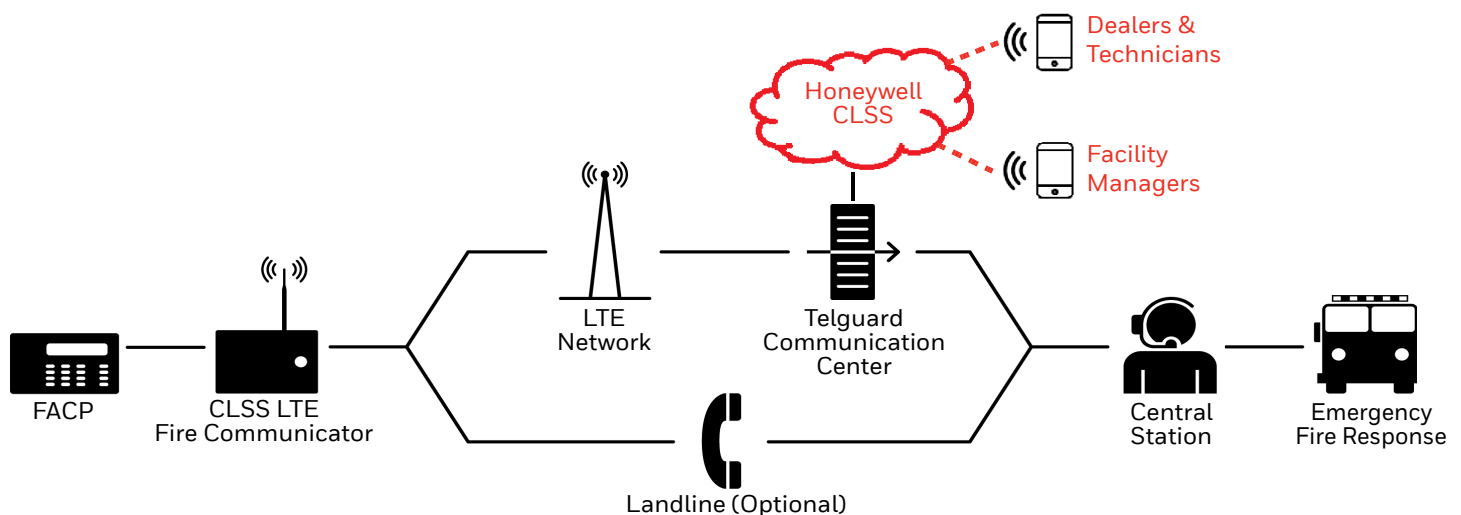

**Honeywell International, Inc.**

[www.fire.honeywell.com](http://www.fire.honeywell.com)

**Telguard**

[www.telguard.com](http://www.telguard.com)

HON-62049 | A | 01-21  
©2021 Honeywell International Inc.

**Honeywell**

