

Page 1 of 2

K-270

Catalog Section: Miscellanous





GENERAL

The Notifier NCM-1 Noise Control Module (patented) is used to reduce common mode noise (noise that is present on both conductors) on the Signaling Line Circuit (SLC). The NCM-1 will allow the use of untwisted, unshielded wire on the SLC. Applications that have audio or fire fighters' telephones require the use of twisted /shielded wiring for all circuits including the SLC. The NCM-1 may still be used in these applications to further reduce common mode noise.

FEATURES

- · Mounts in Cabinet or External
- Use Multiple NCMs for T-Tapped non-shielded connections
- Connects directly to Signaling Circuit
- Pig-Tail Type Connections
- Patented Design (U.S. Patent # 5, 210, 523)

INSTALLATION

The NCM-1 wires directly in line with the SLC Loop. The NCM-1 includes pig-tail leads to connect the SLC circuit. Read the table following, to determine the maximum wiring distance. All distances are rated at maximum allowable distance and AWG wire.

NCM-1 **Noise Control Module**








California State Fire Marshal 7165-0028:141 170-0028:153

MEA 289-91-E

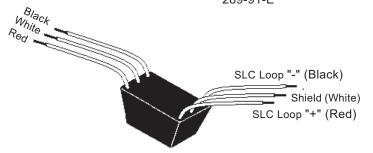

The NCM-1 Noise Control Module

Note: For sytems without shield, cut white wires



AIM-200 / AM2020 / AFP1010 SLC WIRING SPECIFICATIONS (NO AUDIO)

CONDUIT?	SHIELD?	TWISTED PAIR?	MORE THAN ONE SLC LOOP?	ACCEPTABLE WIRE AWG.	MAXIMUM DISTANCE PER LOOP
NO	NO	NO	YES	12 - 18	750 feet/loop
			NO	12 - 18	1,000 feet
NO	NO	YES	YES or NO	12 - 18	2,000 feet Per Loop
NO	YES	NO	YES or NO	12 - 18	2,000 feet Per Loop
YES	YES	NO	YES	12 - 18	2,000 feet/loop
			NO	12 - 14	5,000 feet
YES	NO	YES	YES	12 - 18	3,000 feet
			NO	12	10,000 feet ¹
YES	NO	NO	YES	12 - 18	500 feet/loop
			NO	12 - 18	2,000 feet
NO	YES	YES	YES	12	10,000 feet ¹
			NO	12	10,000 feet ¹
YES	YES	YES	YES	12	10,000 feet ¹

Note ¹ A smaller gauge wire will support shorter distances as follows:

14 AWG. 8,000 ft. Maximum

16 AWG. 4,875 ft. Maximum

18 AWG. 3,225 ft. Maximum